



Project: _____
 Location: _____
 Fixture Type: _____
 Catalog Number: _____

AVAILABLE FINISHES



PN: Polished Nickel


DESCRIPTION

Appealing to your sensibility, this sculpted optic crystal design evokes a dimensional look of fluidity. Two clear cylinder touched by a little grace. Robust functional downlight for illuminating surfaces below. Matching pendant and sconce also available.

FEATURES

- Built-in color temperature adjustability switch from 3000K/3500K/4000K at time of installation
- Can be mounted on wall in all orientations
- Proprietary 120V/277V driver concealed within canopy

LINE DRAWING

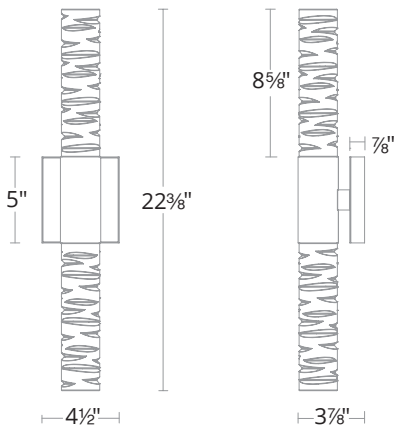

SPECIFICATIONS

CRI	90
Dimming	ELV, TRIAC
Standards	ETL/cETL, Damp, Title 24, ADA

REPLACEMENT PARTS

- RPL-GLA-14222 - V-cut Crystal

Model	Size	LED Color Temp	Finish	Voltage	Wattage	Weight	LED Lumens	Delivered Lumens
BWS14222	22"	3000K/3500K/4000K	PN Polished Nickel	120/277V	28W	10 lb	1444	1076

Example: BWS14222-PN